


Indoor Unit Floor Standing

Specification



Model			MDV-D22Z/N1-F4	MDV-D28Z/N1-F4	MDV-D36Z/N1-F4	MDV-D45Z/N1-F4	MDV-D56Z/N1-F4	MDV-D71Z/N1-F4	MDV-D80Z/N1-F4
			MDV-D22Z/N1-F5	MDV-D28Z/N1-F5	MDV-D36Z/N1-F5	MDV-D45Z/N1-F5	MDV-D56Z/N1-F5	MDV-D71Z/N1-F5	MDV-D80Z/N1-F5
Power supply				1-phase,220-240V,50Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0
	Heating	kW	2.4	3.2	4.0	5.0	6.3	8.0	9.0
Power input	Cooling	W	40	46	46	49	88	130	130
	Heating	W	40	46	46	49	88	130	130
Airflow rate(H/M/L)		m³/h	530/456/400	569/485/421	624/522/375	660/542/440	1,150/970/830	1,380/1,100/870	1,380/1,100/870
Sound pressure level(H/M/L)	F4	dB(A)	36/33/29	36/33/29	37/34/30	37/34/30	41/35/31	44/39/33	44/39/33
	F5	dB(A)	36/33/29	36/33/29	37/34/30	37/34/30	41/35/31	44/39/33	44/39/33
Sound power level(H/M/L)	F4	dB(A)	47/45/42	47/45/42	48/46/43	48/46/43	52/47/44	55/51/46	55/51/46
	F5	dB(A)	47/45/42	47/45/42	48/46/43	48/46/43	52/47/44	55/51/46	55/51/46
Net dimension(WxHxD)	F4	mm	1000x596x225	1000x596x225	1200x596x225	1200x596x225	1500x596x225	1500x596x225	1500x596x225
	F5	mm	1000x677x220	1000x677x220	1200x677x220	1200x677x220	1500x677x220	1500x677x220	1500x677x220
Packing dimension(WxHxD)	F4	mm	1089x683x312	1089x683x312	1289x683x312	1289x683x312	1589x683x312	1589x683x312	1589x683x312
	F5	mm	1182x683x312	1182x683x312	1382x683x312	1382x683x312	1682x683x312	1682x683x312	1682x683x312
Net/gross weight	F4	kg	30/35	30/35	36/44	36/44	41/46.5	41/46.5	42.5/48.5
	F5	kg	30/38	30/38	35.5/41	35.5/41	42/51	42/51	44/53
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller				Wireless remote controller					

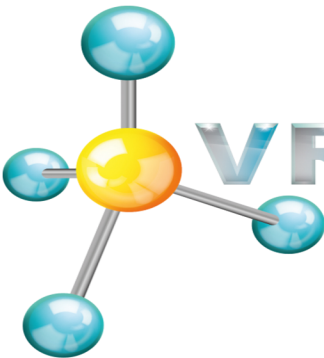

Partnered with MIDEA
Worlds No 1 AC Manufacturer

VRFcentre

Martin Industries Ltd

Unit 8
Milton Business Centre
Wick Drive
New Milton
Hampshire
BH25 6RH
United Kingdom

Telephone: 03300 200003
Tax: 0370 3344559

Email: enquiries@vrfcentre.com
Website: www.vrfcentre.com