


Indoor Units for VRF V4+ Outdoor- Specifications Two Way Cassette



| Model | | | MDV-D22Q2/N1 | MDV-D28Q2/N1 | MDV-D36Q2/N1 | MDV-D45Q2/N1 | MDV-D56Q2/N1 | MDV-D71Q2/N1 |
|-----------------------------|---------------------|-------------------|--------------|--------------|----------------------------|--------------|--------------|-----------------|
| Power supply | | | | | 1-phase,220-240V,50Hz | | | |
| Capacity | Cooling | kW | 2.2 | 2.8 | 3.6 | 4.5 | 5.6 | 7.1 |
| | Heating | kW | 2.6 | 3.2 | 4.0 | 5.0 | 6.3 | 8.0 |
| Power input | Cooling | W | 57 | 57 | 60 | 92 | 108 | 154 |
| | Heating | W | 57 | 57 | 60 | 92 | 108 | 154 |
| Airflow rate(H/M/L) | | m ³ /h | 654/530/410 | 654/530/410 | 725/591/458 | 850/670/550 | 980/800/670 | 1,200/1,000/770 |
| Sound pressure level(H/M/L) | | dB(A) | 33/29/24 | 36/32/29 | 36/32/29 | 39/35/30 | 39/35/30 | 44/40/34 |
| Sound power level(H/M/L) | | dB(A) | 44/41/37 | 47/44/42 | 47/44/42 | 50/48/43 | 50/48/43 | 55/52/47 |
| Main body | Net dim.(WxHxD) | mm | 1172x299x591 | 1172x299x591 | 1172x299x591 | 1172x299x591 | 1172x299x591 | 1172x299x591 |
| | Packing dim.(WxHxD) | mm | 1355x400x675 | 1355x400x675 | 1355x400x675 | 1355x400x675 | 1355x400x675 | 1355x400x675 |
| | Net/gross weight | kg | 34/42.5 | 34/42.5 | 34/42.5 | 36/44.5 | 36/44.5 | 36/44.5 |
| Panel | Net dim.(WxHxD) | mm | 1430x53x680 | 1430x53x680 | 1430x53x680 | 1430x53x680 | 1430x53x680 | 1430x53x680 |
| | Packing dim.(WxHxD) | mm | 1525x130x765 | 1525x130x765 | 1525x130x765 | 1525x130x765 | 1525x130x765 | 1525x130x765 |
| | Net/gross weight | kg | 10.5/15 | 10.5/15 | 10.5/15 | 10.5/15 | 10.5/15 | 10.5/15 |
| Piping connections | Liquid/gas pipe | mm | Φ6.35/Φ12.7 | Φ6.35/Φ12.7 | Φ6.35/Φ12.7 | Φ6.35/Φ12.7 | Φ9.53/Φ15.9 | Φ9.53/Φ15.9 |
| | Drain pipe | mm | OD Φ32 | OD Φ32 | OD Φ32 | OD Φ32 | OD Φ32 | OD Φ32 |
| Standard controller | | | | | Wireless remote controller | | | |

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°C DB, 19°C WB, outdoor temperature: 35°C DB, equivalent ref. piping: 7.5m (horizontal).
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°C DB, outdoor temperature: 7°C DB, 6°C WB, equivalent ref. piping: 7.5m (horizontal).
3. Sound level is measured at 1.4m below the unit.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

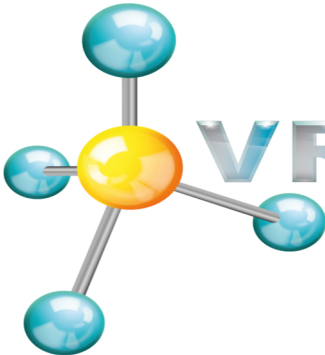

Partnered with MIDEA
Worlds No 1 AC Manufacturer

VRFcentre

Martin Industries Ltd

Unit 8
Milton Business Centre
Wick Drive
New Milton
Hampshire
BH25 6RH
United Kingdom

Telephone: 03300 200003
Tax: 0370 3344559

Email: enquiries@vrfcentre.com
Website: www.vrfcentre.com